

Receiver

Society
Reference
Address
Phone
Fax
E-mail

From

DAB PUMPS OCEANIA
FARMS OF THE FUTURE PROGRAM,
426 SOUTH GIPPSLAND HWY, DANDENONG SOUTH
1300 378 677

FOTF.AU@DABPUMPS.COM

Item n° :

60202386

Customer pos. no.:

Model :

1 ESYBOX MAX 60/120 M


Pump data

Pressure rating : 11,84 atm
Constant pressure range : 0,9869 1,84 atm (2,96 atm by default)
Min. fluid temperature : 0 °C
Max. fluid temperature : 50 °C
Max. Ambient temperature : 55 °C

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure : 0,02 atm

Curve tolerance according to ISO 9906

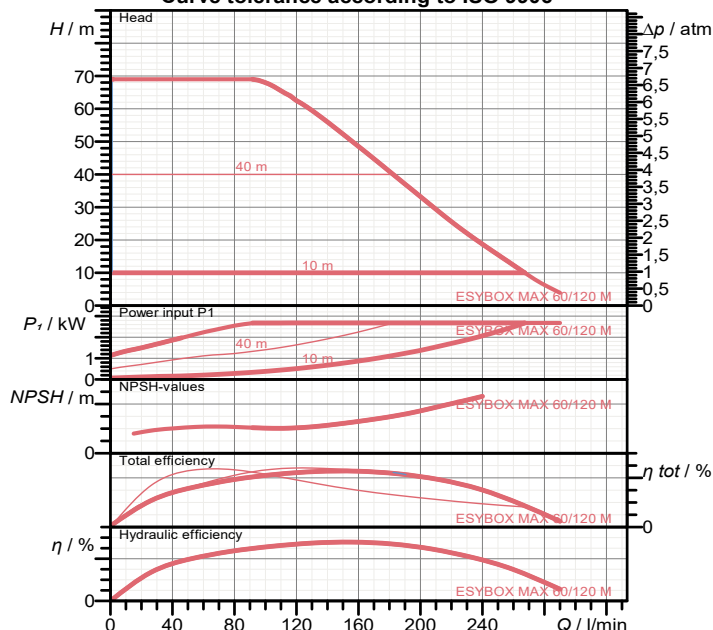


Materials

Fitting: Technopolymer PA66 30%GF
Manifold: Stainless Steel AISI 304
Flange: Technopolymer PA66 30%GF
Pump body: Technopolymer PA66 30%GF
Pump body ring: Technopolymer PP 30%GF
Impeller: Technopolymer PP 30%GF/AISI 304
Diffuser: Technopolymer PP 30%GF/AISI 304
Motor axis: Stainless Steel AISI 303
O-Ring: EPDM
Motor flange: Technopolymer PA66 30%GF
Mechanical seal: Impregnated carbon-resin/Silicon carbide/EPDM
Motor liner: Stainless Steel AISI 304
Motor body: Technopolymer PA66 30%GF
Conveyor tube: Technopolymer PP 30%GF
Pressure sensor: Nylon/EPDM
Non-return valve: POM/EPDM/AISI 302
Non-return valve body: Technopolymer PA66 30%GF
Tank: Noryl/Rubber
Delivery body: Technopolymer PA66 30%GF
Outer liner: Stainless Steel AISI 304

Hydraulic data (duty point)

Flow :
Head :

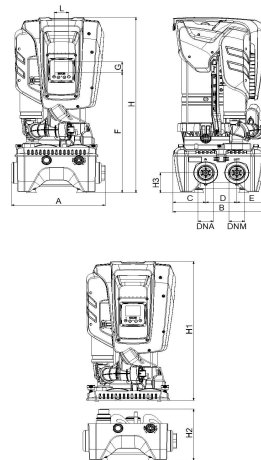

Dimensions in mm

A	375	E	127,7	H3	87		
B	384	F	526	L	59,5		
C	131,8	G	45				
D	124,5	H	766				
DNA	1"1/4 - ;	H1	613				
DNM	1"1/4 - ;	H2	228				

Weight : 38 kg

Pump connection

Suction side : 1"1/4 - 2" G / 11,84 atm
Discharge side : 1"1/4 - 2" G / 11,84 atm

Motor data


Power input P1 : 1 x 2,68 kW
Maximum speed : 5.240 1/min
Rated voltage : 1~ 208-240 V 50 Hz
Nominal current : 1 x 11,7 A
Degree of protection : IP X5

ENERGY SAVING

BEFORE

AFTER

- **20%**
Compared with
traditional inverter pump

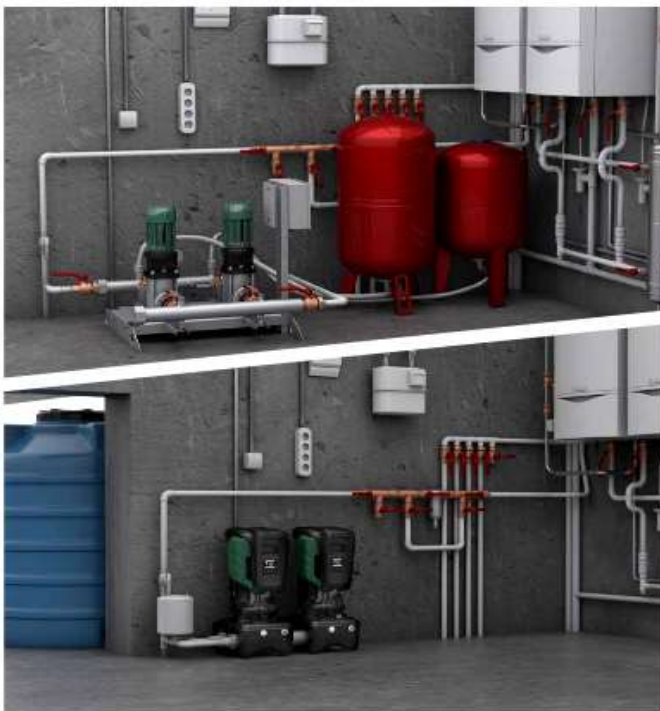

D+CONNECT
BUILT-IN



As quick as a "click"





PERFORMANCE CURVES

2023-01-12

Page 6 / 7

DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Society
Reference
Address
Phone
Fax
E-mail

Receiver


From

DAB PUMPS OCEANIA
FARMS OF THE FUTURE PROGRAM,
426 SOUTH GIPPSLAND HWY, DANDENONG SOUTH
1300 378 677

FOTF.AU@DABPUMPS.COM

1 ESYBOX MAX 60/120 M

Curve tolerance according to ISO 9906

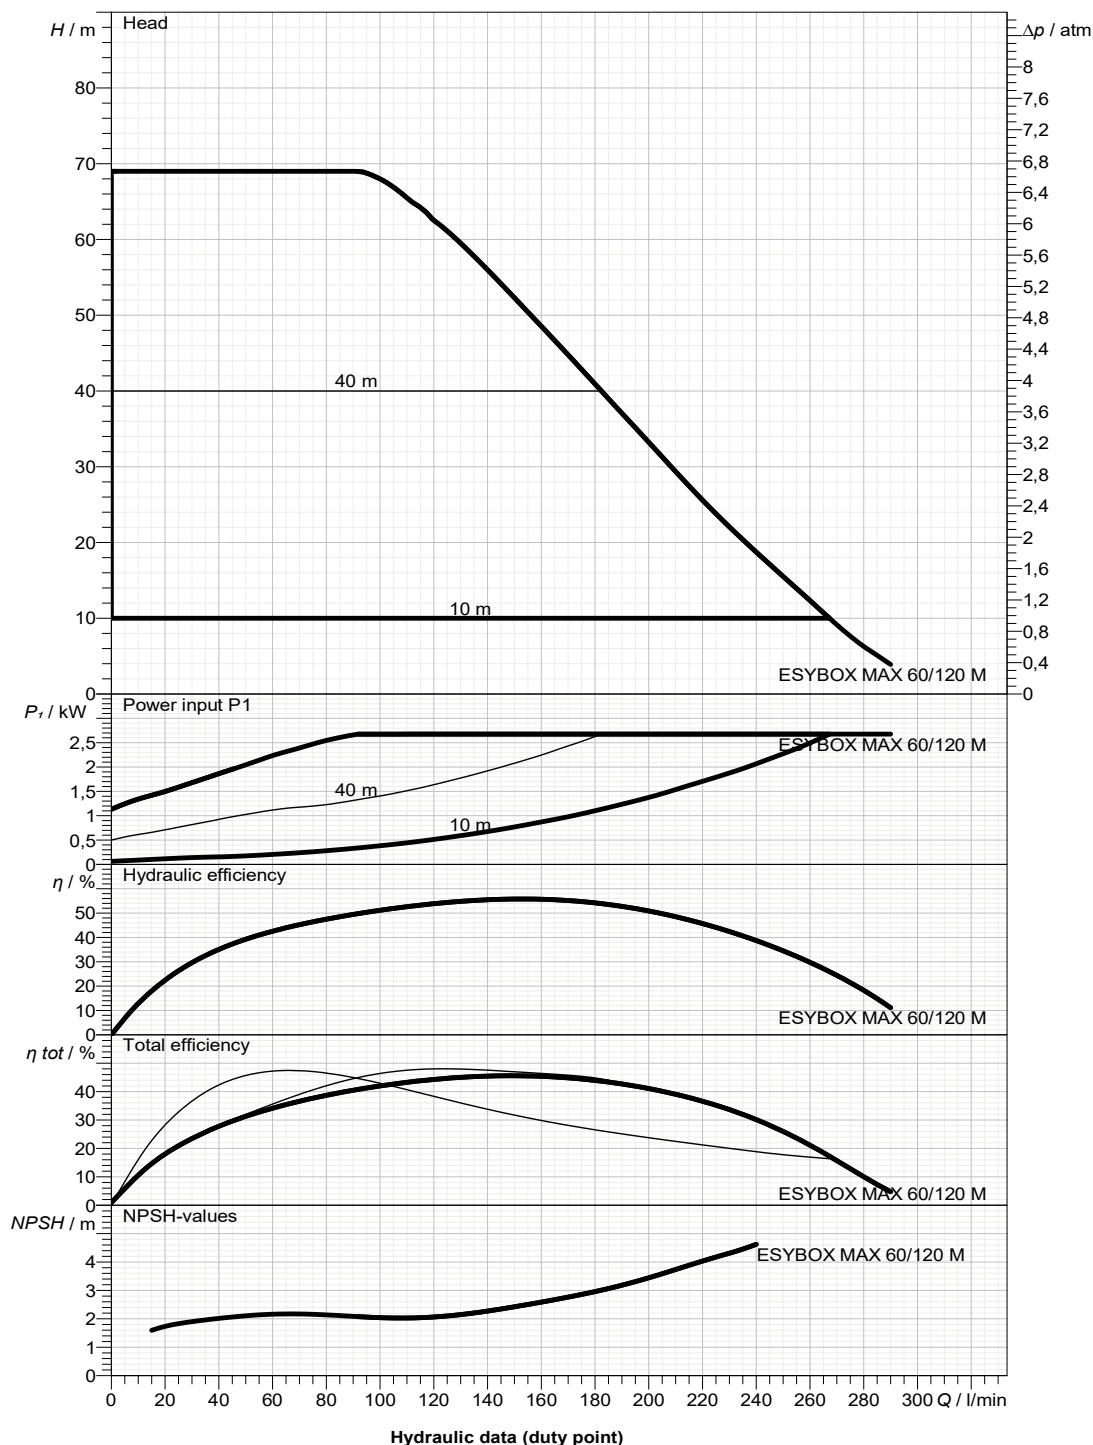

Suction side :
1"1/4 - 2" G
11,84 atm

Discharge side :
1"1/4 - 2" G
11,84 atm

Flow :

Head :

Rated speed :
5.240 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2023-01-12



DIMENSIONAL DRAWING

2023-01-12

Page 7 / 7

DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DAB PUMPS OCEANIA
FARMS OF THE FUTURE PROGRAM,
426 SOUTH GIPPSLAND HWY, DANDENONG SOUTH
1300 378 677
FOTF.AU@DABPUMPS.COM

1 ESYBOX MAX 60/120 M

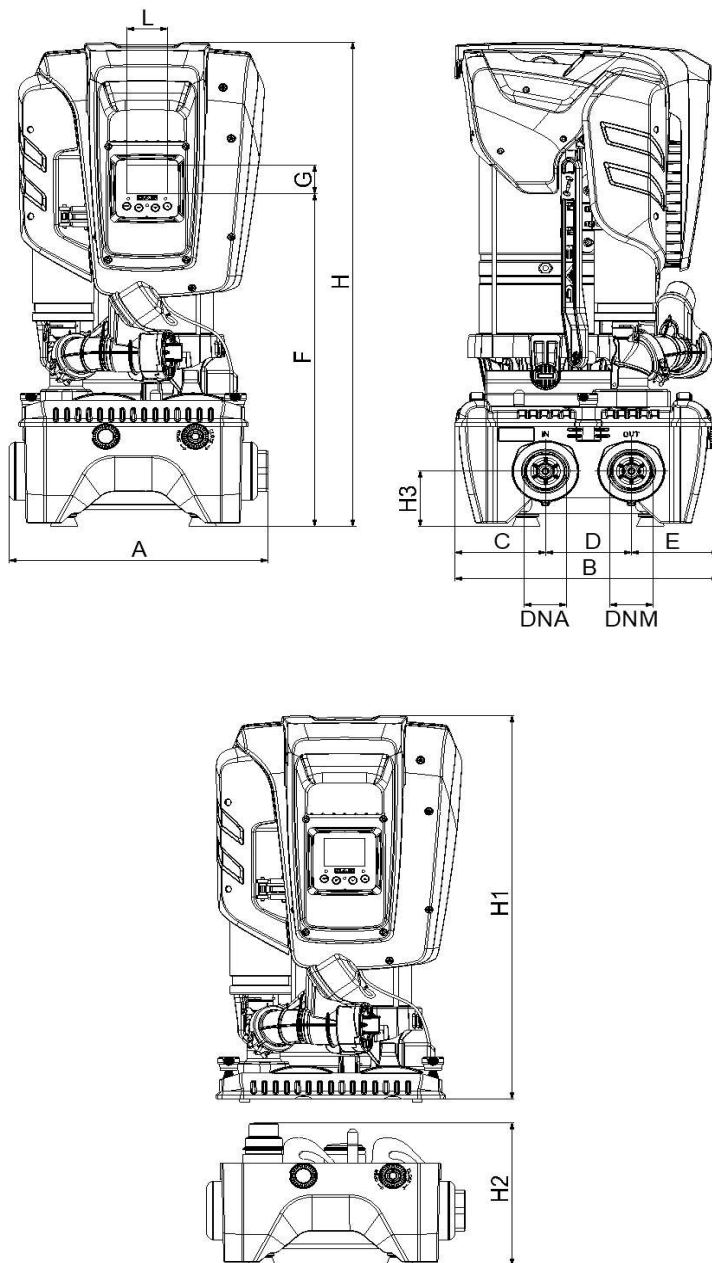

Dimensions in mm

Pump connection

1	A	375	H2	228			
2	B	384	H3	87			
3	C	131,8	L	59,5			Suction
4	D	124,5					1"1/4 - 2" G
5	DNA	1"1/4 - 2"					11,84 atm
6	DNM	1"1/4 - 2"					
7	E	127,7					Discharge
8	F	526					1"1/4 - 2" G
9	G	45					11,84 atm
10	H	766					
11	H1	613					

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2023-01-12